


Model Image ECO



Description

The emco Image ECO is made of the high-quality, sustainable ECONYL® brand yarn and is characterised by a high absorption of dirt and moisture. Through the excellent printability, the emco Image ECO has an outstanding advertising effect. The ECONYL® regeneration process transforms, what was once waste, into a new source of opportunities, which in this case is the production of emco Image ECO carpet mats. Nylon waste, such as fishing nets, that are no longer usable and would go into disposal, are now collected and transformed into new yarn. The waste is transformed into a 100% regenerated yarn, which has the same properties as nylon, made from new raw materials.

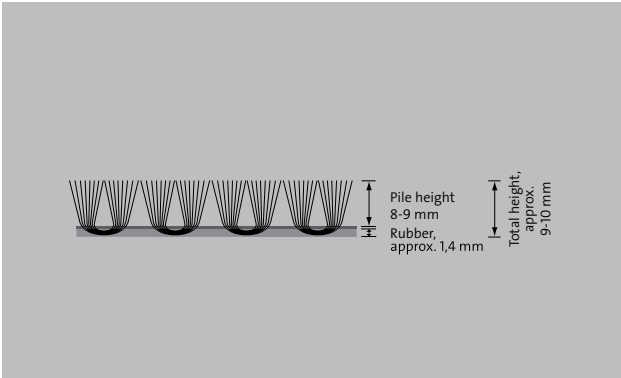


Carpet mats

Model Image ECO


Colours




01.100.S



01.30.S



03.260.S




04.10.S



04.110.S




04.60.S



05.190.S




05.210.S




05.270.S




06.120.S



06.130.S



06.180.S



06.200.S



06.70.S




07.160.S



07.220.S




07.230.S



07.280.S




07.60.S




01.110.B



01.170.B



01.20.B




01.40.B




01.60.B




02.130.B



02.170.B



02.20.B



02.220.B



02.230.B



02.30.B




02.40.B




02.50.B



02.60.B




02.70.B




02.80.B




03.100.B



03.140.B



03.150.B




03.160.B




03.170.B




03.200.B




03.210.B




03.240.B



03.270.B




03.280.B



03.50.B



03.60.B




03.80.B




04.20.B



04.40.B



04.90.B



05.150.B



05.170.B



05.180.B




05.20.B




05.20.B



05.240.B



05.260.B




05.330.B




05.40.B



05.70.B




05.80.B




06.140.B



06.160.B



06.20.B



06.270.B



06.280.B




06.30.B




06.40.B




06.60.B




06.80.B



07.10.B



07.180.B




07.190.B



07.50.B



07.70.B



07.90.B



Carpet mats

Model Image ECO

Backing material	Nitrile rubber coating, thickness approx. 1.4 mm, smooth or dimpled
Border width	Approx. 20 mm
Pile height	Approx. 8 - 9 mm
Pile material	100 % polyamide ECONYL® brand-name fibre, pile weight 900 g/m ²
Height	Approx. 9 - 10 mm
Total weight (g/m²)	2700
Dimension tolerance in %	+/- 3 %
Tread border label	By request
Water absorption	Approx. 3 to 4 litres per m ²
Max. washing temperature °C	60
Fastness to washing	No colour degradation

Oil resistant (nitrile rubber back)	Extremely good
Electrostatic behaviour	Extremely low electrostatic charging, volume resistance 2.2 x 10 ¹¹ Ohms, in acc. with DIN 54345
Resistance to fire	Available on request (surcharge applicable) with fire classification Cfl-s1 according to EN 13501.
Warranty	Statutory warranty period 2 years, subject to proper care, cleaning and storage.
Standard width (cm)	85 115 150 200 Special dimensions possible, up to 200 x 500 cm

Subject to technical modifications/Colours may deviate due to production processes