
Model OUTDOOR





Description

The right choice for outdoors. Durable due to extremely high weather-resistance. Optimum absorption of coarse dirt, and it lays perfectly. Available as rolls or mats.

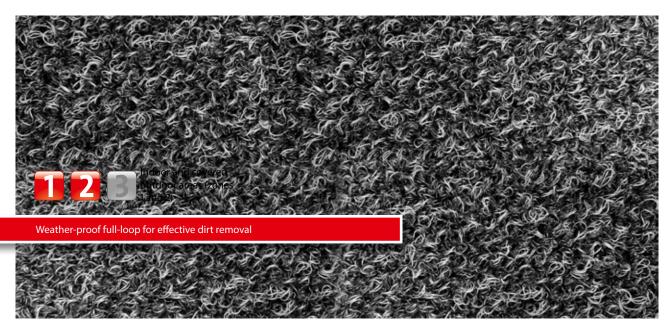





Anti-static Suitak stairs

Suitable for DS

DS (EN 13893) Resistant strength

Cfl-s1



ort level: Hi

Comfort level: Highly simple suitable for property

for



Model OUTDOOR

Construction	5/32" tufting	Supplied as mats Product characteristics	60 x 90 cm (incl. border)
Pile above substrate	100% polyamide		90 x 150 cm (incl. border)
Substrate material	Polyester fleece		. ,
Backing material	Heavy coating	Product characteristics	Soiling and moisture absorption
Pile weight / fibre weight	600	Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.
Total weight (g/m²)	3.200		
Overall height (mm)	8		
Tuft density/m ²	64.000	Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
Slip resistance	DS (EN 13893)		
Certificates	CE conformity EN 14041 (rolls only)		
Supplied as rolls	100 cm wide (incl. border) 200 cm wide (incl. border)		
		Brand	emco



Model OUTDOOR


Colours



Anthracite



Brown



Red

Subject to technical modifications

emco Bautechnik GmbH · Memeler Straße 30 · D-42781 Haan · Germany · Tel.: +49 (0)21 29/34 75 80 · Telefax: +49 (0)21 29/34 75 810 · E-Mail: sauberlauf@ emco.de · www.emco-bau.com

